



ABLOY® PROTEC Tubular deadbolts

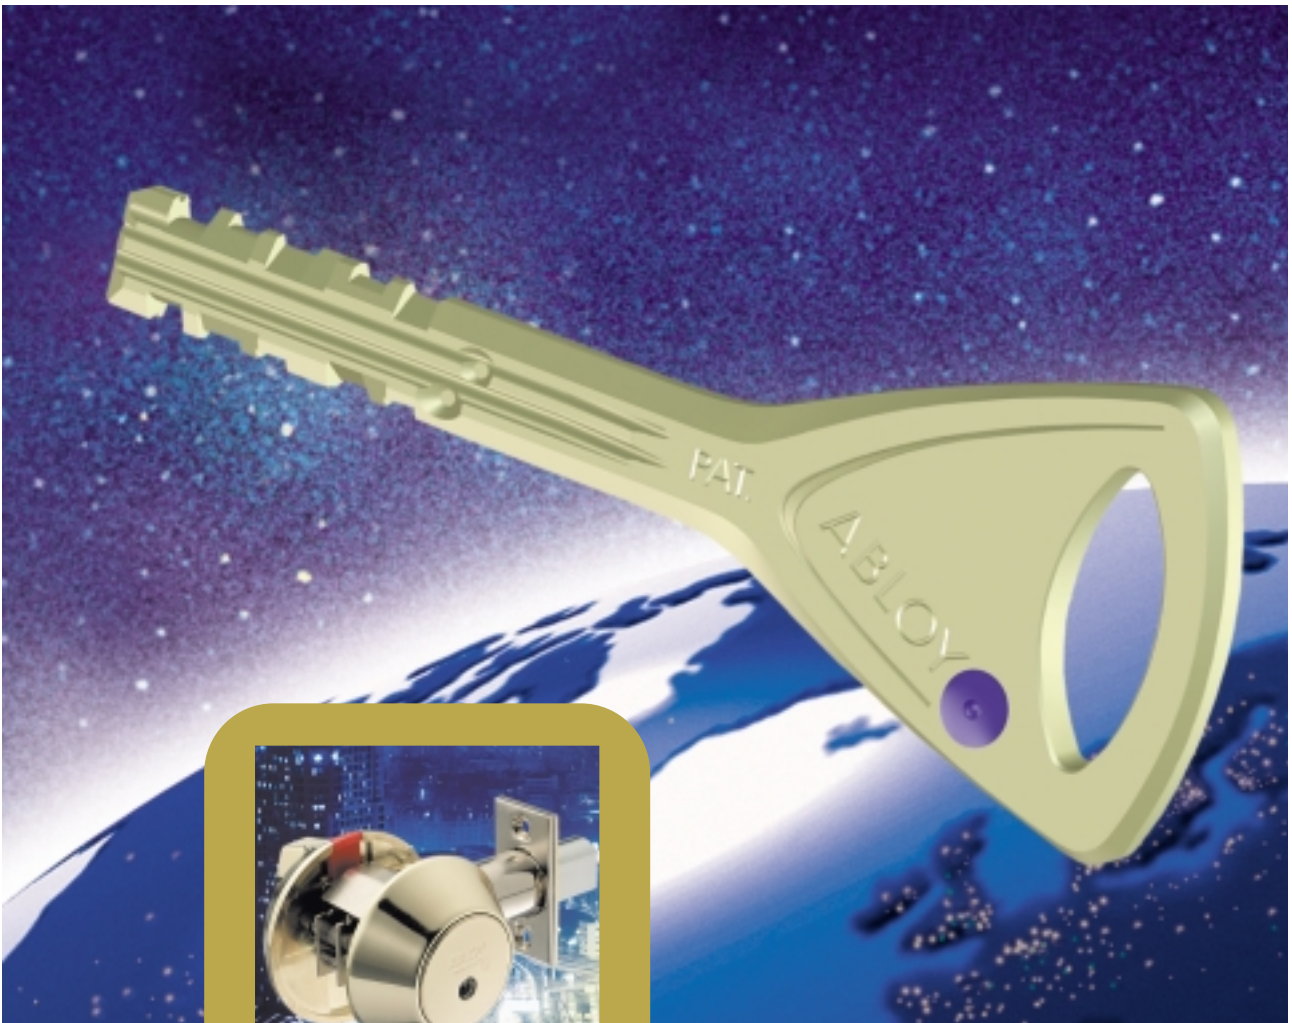

ABLOY® PROTEC is the culmination of 90 years of world-leading development of the rotating disc cylinder.



SECURITY FEATURES

- UL listed products
- Case hardened steel cylinder housing
- Optional key lockable thumbturn
- 1/4" (6 mm) steel retaining screws
- High Security bolt
- hardened steel
- 1" (25.4 mm) throw
- Reinforced steel strike box
- Protective bolt shield

FINISHES AVAILABLE

- US26 (Bright chrome)
- US3 (Bright brass)
- US26D (Satin chrome)
- US4 (Satin brass)

Fits 1-3/4" (44.5 mm) to 2-1/8" (54 mm) hole. Standard hardware for 1-3/4" (44.5 mm) thick door included.

STANDARD BOLT				DRIVE-IN BOLT			
Code	A	Code	A	Code	A	Code	A
4344	2 3/4"(70)	4346	2 3/8"(60)	4345	2 3/4"(70)	4347	2 3/8"(60)

LOCK ASSEMBLY LESS BOLT	Model No.	Model No.	Model No.	Model No.
<p>CY411N DOUBLE CYLINDER + STRIKE 4785</p>	ME103N	ME105N	ME104N	ME106N
	BOLT OPERATED BY KEY OUTSIDE AND INSIDE			
<p>CY412N SINGLE CYLINDER WITH THUMBTURN + STRIKE 4785</p>	ME107N	ME109N	ME108N	ME110N
	BOLT OPERATED BY KEY OUTSIDE AND THUMBTURN INSIDE			
<p>CY413N SINGLE CYLINDER WITH KEY LOCKABLE THUMBTURN + STRIKE 4785</p>	ME111N	ME113N	ME112N	ME114N
	BOLT OPERATED BY KEY OUTSIDE AND THUMBTURN INSIDE. INSIDE THUMBTURN CAN BE LOCKED WITH PROPER KEY TO PROVIDE DOUBLE CYLINDER SECURITY.			



Abloy Oy
Wahlforsinkatu 20
P.O. Box 108
FIN-80101 JOENSUU
FINLAND
Tel. +358 13 2501
Fax +358 13 250 2209



www.abloy.com